

Aggregation Router

AS7946-74XKSB



AGR420 is a high performance 25GbE aggregation router that consists of fixed 64 x 10G/25G SFP28, 8 x 100GE QSFP28 and 2 x 100G QSFP-DD (supporting high power optics only, compatible with QSFP28 also) network interface configuration with External BCM16K Lookup Engine enables the 2RU compact design to be deployed as a disaggregated or standalone router.

The BCM16K Knowledge-Based Processor (KBP) performs high-speed operations on large-rule databased for a wide range of telecommunications applications. It provides network awareness, enables real-time modifications, and updates to the routing configuration, making it ideal for packet classification, policy enforcement, and forwarding.

AGR420 is engineered with the latest Broadcom StrataDNX™ Qumran2C silicon with an external lookup engine that target for use cases including OpenBNG, 25G pre-aggregation router, PE router or data center TOR switch/router.

This open networking router is loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible Network Operating System (NOS) software, including the open source option Open Network Linux (ONL), plus commercial NOS offerings.

Key Features and Benefits

- High performance 25GbE router for Telecom and Data Center applications
- Incorporates Broadcom StrataDNX™ Qumran2C Silicon
- Integrated BCM16K External Lookup Table for expansion
- Supports Front-to-Back Airflow SKU
- Hot-Swappable, Load-sharing, and 1+1 redundant DC-DC/AC-DC PSUs
- 4+1 Redundant, Hot-Swappable Fan Modules
- Support Synchronous Ethernet(SyncE), and IEEE 1588v2 PTP

Applications

- Disaggregated edge, PE or pre-aggregation router
- Standalone 25GbE aggregation router
- Virtual Broadband Gateway (vBNG)



Freedom
of choice



Greater
control



Rapid
innovation




Reduced
CAPEX and OPEX

Free Software Included

onle

Interfaces

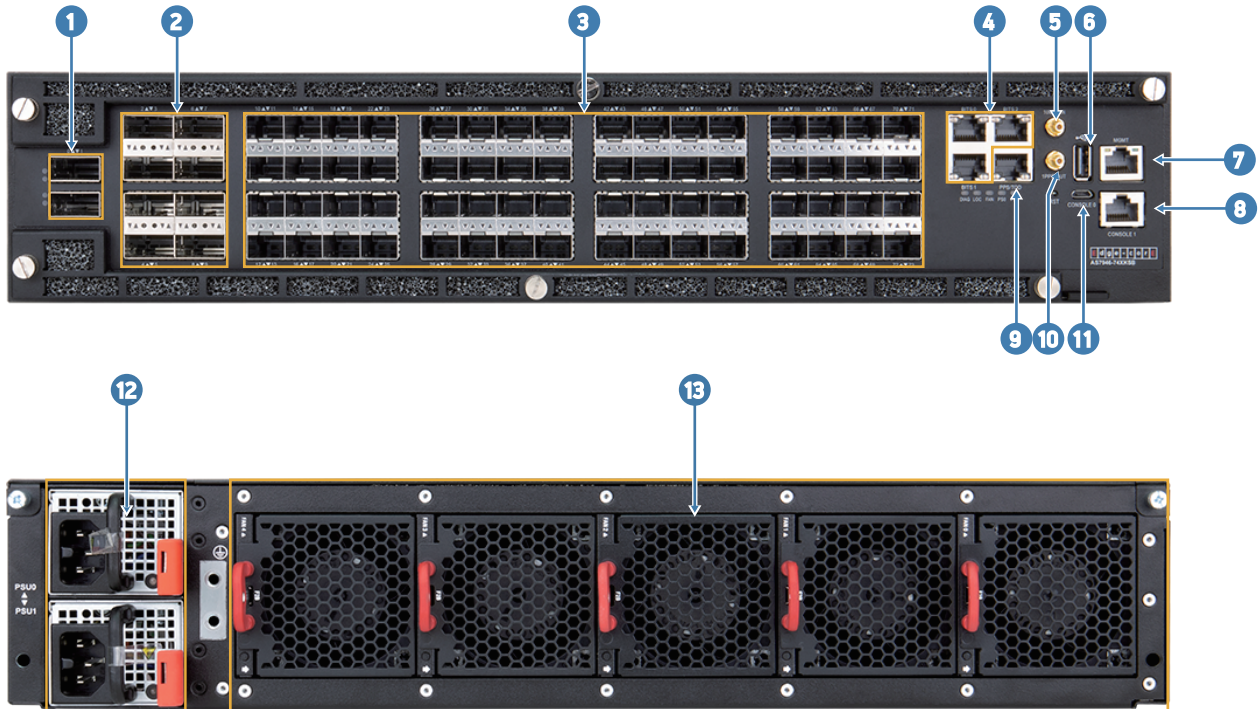

Description

- | | |
|----------------------------------|------------------------------------|
| 1. 2 x 100G QSFP-DD ports | 8. 1 x RJ-45 console port |
| 2. 8 x 100G QSFP28 ports | 9. 1 x PPS/TOD port |
| 3. 64 x 25GE SFP28 ports | 10. 1 x SMB1PPS out |
| 4. 3 x RJ-45 BITS ports | 11. 1 x Micro USB console port |
| 5. 1 x SMB10MHz in | 12. 1+1 DC-DC/AC-DC PSUs redundant |
| 6. 1 x USB Type A | 13. 4 +1 redundant fans |
| 7. 1 x RJ-45 OOB management port | |

Ports

- Switch Ports:
 - 64 x 10G/25G SFP28
 - 8 x 100G QSFP28
 - 2 x 100G QSFP-DD (support high power 100G optics only)
 - Support 1GE, 10G, 40GE and 100GE modes
 - Support standard 1GE, 10GE, 25GE, 50GE configurations by using DAC breakout cables into 2x50GE, 4x25GE, or 4x10GE
- Management ports:
 - 1 x RJ-45 Console Port
 - 1 x RJ-45 10/100/1000BASE-T Management Port
 - 1 x USB 2.0 Port
 - 1 x Micro USB Console Port
- Supported Transceivers and Cables:
 - 1000BASE-EX/ZX
 - 10GBASE-SR/LR/ER/ZR
 - 100GBASE-SR4/LR4/ER4/ZR4/PSM4-2
 - Note: More optics and detailed cabling information can be found at www.edge-core.com.
- Timing:
 - 3 x RJ45 (T12 or E12 input/output)
 - 1 x RJ45 ToD/PPS
 - 1 x SMB (1PPS out)
 - 1 x SMB (10MHz input)

Key Componets

- Switch Silicon: Broadcom Qumran-2C BCM88820
- External TCAM: Broadcom BCM16K
- CPU Modules:
 - Intel® D-1548 8C
 - SDRAM DDR4 SO-DIMM 32GB (16 GB x 2)
 - SPI Boot Flash redundant (2 x 16 MB)
 - SSD: M.2 128GB
- BMC: ASPEED AST2600

Performance

- Capacity: 2.4 Tb/s

Physical and Environmental

- Dimensions (WxDxH): 440 mm x 480 mm x 87 mm (2RU)
- Weight: 16 Kg with PSUs and Fans
- Fans: Hot-swappable 4+1 redundant fans
- Operating Temperature/Humidity:
 - 0°C to 45°C (32°F ~ 113°F)/5% to 85%

Power

- 1 + 1 Redundant and Hot-swappable
- 48 VDC Power Supply:
 - 36-72 VDC input
 - Front-to-back airflow
 - Supports load-sharing function
- AC Power Supply:
 - 90-240 VAC input
 - Front-to-back airflow
 - Supports load-sharing function
- Maximum PSU Capacity: 1300 W

* NEBS Pre-Test. Certificate is by request with fees.

Regulatory: (Preliminary)

- Safety
 - UL (CAN/CSA 22.2 No 60950-1 & UL60950-1)
 - IEC 62368-1:2014
 - CB (IEC/EN60950-1)
 - CCC (GB4943.1-2011)
- Electromagnetic Compatibility
 - CE Mark
 - EN 55032 Class A
 - EN 55024 (Immunity) for Information Technology Equipment
 - EN 61000-3-3
 - EN 61000-3-2
- FCC Title 47, Part 15, Subpart B Class A
- CCC (GB9254-2008)
- Environmental
 - NEBS Level 3*
 - Bump: IEC60068-2-29- packaged
 - Shock: ETSI EN 300 019-2-3 -Operational Tests, Class T3.2 op
 - RoHS 2.0 Compliant
 - WEEE Standards: The switches complied with the following
 - WEEE standards: Waste Electrical and Electronic Equipment (WEEE Directive 2002/96/EC)

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2022 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

Ordering Information

Base model: AS7946-74XKSB; Intel® D-1548 8C; 64 x 10G/25G SFP28, 8 x 100GE QSFP28, and 2 x 100G QSFP-DD fixed ports. ONIE software installer.

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS7946-74XKSB-O-AC-F	FNPEC7946008Z	Modular Dual AC PSUs	Front to Back Airflow	N/A
AS7946-74XKSB-O-DC-F	FNPEC7946007Z	Modular Dual DC PSUs	Front to Back Airflow	N/A