

S9705-48D

Disaggregated Core Fabric Router



The S9705-48D is the best of breed robust, flexible and carrier-grade disaggregated IP/MPLS router that can be deployed in the core or edge to transport services over a scalable next-gen service provider network. Equipped with 400GE fabric ports, S9705-48D enables fault & performance monitoring, non-stop routing support for control and data plane, and comprehensive high-availability networks.

The S9705-48D fabric couples with S9700 router in small, medium and large clusters enabling 4Tb to 192Tb maximum switching capacity. By connecting to the S9700-53DX, it scales out not only economically but rapidly which brings down the total cost of ownership.

S9705-48D adopts the innovative discrete NCP (Network Cloud Processor) and NCF (Network Cloud Fabric) building blocks providing flexibility to core router needs in the industry, integral to Ethernet switching performance and intelligence to networks while minimizing the network complexity.

Key Benefits

- ▶ Support for 8 billion cells per second
- ▶ Internal data cells memory
- ▶ Individual BMC operation
- ▶ High density port with low power consumption
- ▶ Transparent networking, interoperability with S9700-23D and S9700-53DX
- ▶ Upstream connectivity management supported by three flexibly configured fabric pipes
- ▶ Dynamic distribution and routing through automatic fault detection and recovery

Key Features

- ▶ 48 x 400GE QSFP-DD fabric ports
- ▶ 1 + 1 hot swappable PSU FRU
- ▶ 3 + 1 hot swappable FAN FRU
- ▶ Micro USB and RJ-45 console port
- ▶ Intel Broadwell-DE 8 core at 2 GHz
- ▶ 64GB memory DDR4 RDIMM with ECC
- ▶ Supports up to 4 x DDR4 RDIMM with ECC



Specifications

Physical

- ◆ 48 x 400GE QSFP-DD fabric ports
- ◆ 1 x RJ-45 + Micro USB serial console ports
- ◆ 1 x 1GBase-T Ethernet port for Out-of-Band management
- ◆ 1 x USB 2.0 Type-A general purpose port
- ◆ 2 x 10GBase-X SFP+ management ports

Processor Intel® Broadwell-DE 8 core @ 2.0 GHZ

Memory 2 x 32GB DDR4 RDIMM with ECC support

Storage 2 x M.2 SATA SSD 128GB

ASIC Broadcom BCM88790

- LED**
- ◆ 2 x power status
 - ◆ Fan status
 - ◆ System status
 - ◆ Per port link status
 - ◆ Beacon
 - ◆ Per fan status
 - ◆ Per PSU status

Chassis (WxDxH) 2RU, 436 x 762 x 87.6 mm | 17.17 x 30 x 3.45 in.
Weight: 24.9 kg (54.9 lbs)

Fan Trays Hot swappable, 3+1 redundant FRU

Environmental

Power supply Hot swappable, 1+1 redundant FRU
AC input: 200 ~ 240V, 12.5A, 50 ~ 60Hz
DC input: -40 ~ -72V, 60 ~ 33A
Max power: 2000 Watts

Operating Specs. Operating temperature: 0°C to 45°C (32°F to 113°F)
Operating humidity: 5% to 85% (RH), noncondensing
Altitude: 1,829 m (6,000 ft.)

Non-Operating Specs. Storage temperature: -40°C to 70°C (-40°F to 158°F)
Storage humidity: 5% to 95% (RH), non-condensing

Performance

Packet Throughput 8 billion cells

Regulatory Compliance


Safety NEBS Level3
UL 62368-1
IEC/EN 60950-1
IEC/EN 62368-1
BSMI CNS 14336-1

EMC NEBS Level 3
FCC Part 15, Subpart B,
Class A EN55032, Class A
EN300 386
EN55024
EN55035
BSMI (CNS 13438), Class A

All product specifications are subject to change without notice



S9705-48D Views

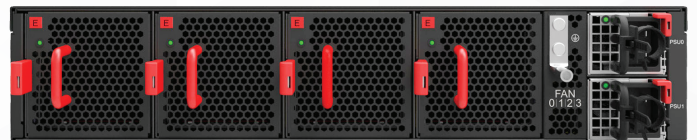

Supported Accessories

Transceiver 400GE QSFP-DD SR8, 400GE QSFP-DD LR8, 400GE QSFP-DD DR4, 400GE QSFP-DD FR4, 100GE QSFP28 SR4, 100GE QSFP28 LR4, 100GE QSFP28 ER4

Cable types 400GE QSFP-DD DAC (Direct Attach Cable)
400GE QSFP-DD ACC (Active Copper Cable)
400GE QSFP-DD AOC (Active Optical Cable)
100GE QSFP28 DAC (Direct Attach Cable)
100GE QSFP28 ACC (Active Copper Cable)
100GE QSFP28 AOC (Active Optical Cable)

Power supply types PSU-202-DESR 2000W DC PSU, exhaust air flow
PSU-202-AESR 2000W AC PSU, exhaust air flow

Fan types FAN-803816-HC, exhaust air flow

Rack mounting kit R19-970000-2630 sadjustable mounting rail for 19" rack supporting depth from 26" to 30"