



Linktropy® Mini Series WAN Emulators

Linktropy Mini² / Linktropy Mini-G™

Basic WAN emulation capabilities at unbeatable prices.



The Linktropy Mini² and Mini-G are portable, low cost, easy-to-use WAN emulators, designed to emulate basic network conditions for application development and customer demonstrations of networking products.

The Linktropy Mini Series WAN emulators simulate bandwidth, latency, and loss separately in each direction. Their small size and light weight make them easy to carry, while their fanless design and solid-state storage offers silent operation with high reliability. The Mini² simulates links up to 100 Mbps while the Mini-G handles links up to 1 Gbps.

An intuitive, browser-based interface makes installation and configuration quick and easy. A real-time traffic monitor displays throughput graphs and statistics, revealing the effects of WAN conditions on application performance. Together, the GUI allows users to grasp the test conditions at a glance and quickly view the results.



Simulate

Bandwidth

Latency & Jitter

Packet Loss

User Interface

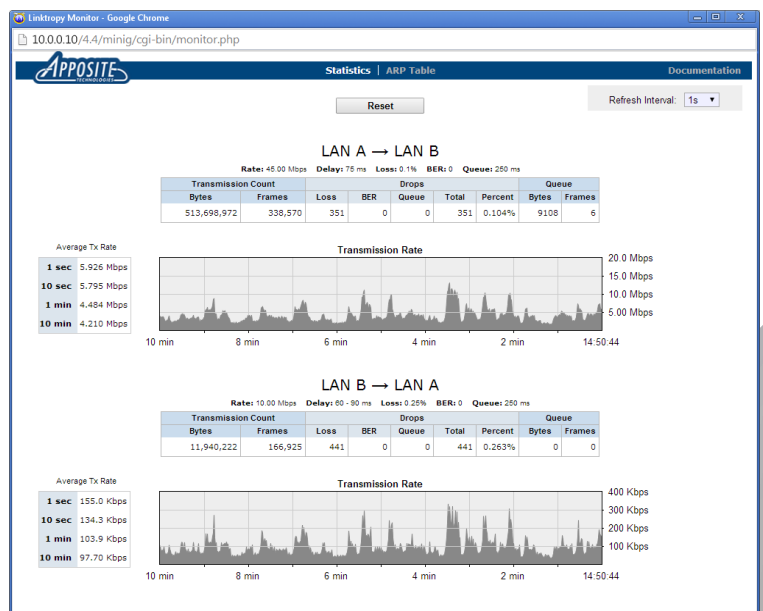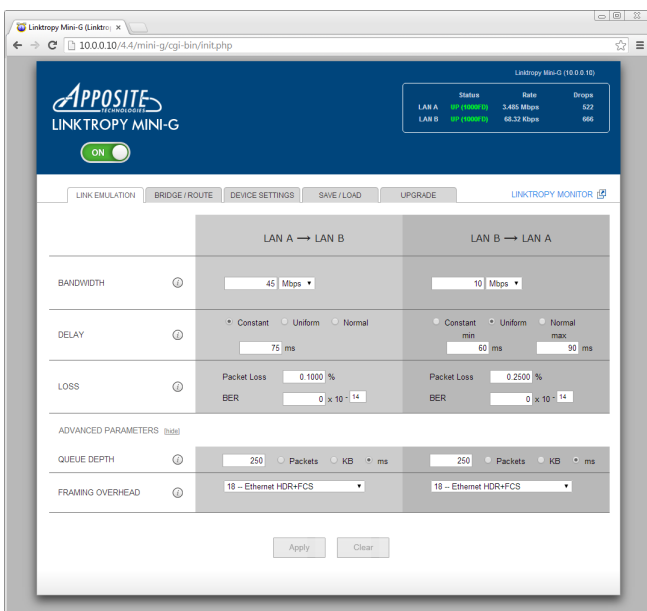

Features

Easy to Use: The Linktropy Mini Series emulators are a snap to install and configure. Just plug in the Ethernet cables, specify the link conditions, and begin testing. No software to install, no training needed.

Bandwidth up to 1 Gbps: Emulate links up to 1 Gbps in each direction with the Mini-G and 100 Mbps with the Mini2.

Delay up to 10 seconds: Emulate latency from 0.1 ms. up to 10 sec. in each direction in a constant, normal, or uniform distribution.

Error Emulation: Specify loss as a packet loss rate, bit error rate, or both.

Emulate any WAN: Emulate terrestrial, wireless, internet, satellite or any other type of wide area network.

Traffic Monitor: See a visual display of the current traffic, including throughput graphs and link statistics.

Bridging/Routing: Install the device as either a bridge or router.

Portable: Carry the Linktropy Mini² or Mini-G with you. Their small size and light weight make them easy to take wherever you travel.

Everything You Need: Everything you need to emulate a WAN is included in these compact devices. No additional hardware or software required.

| Specifications | Mini ² | Mini-G |
|---------------------------|--------------------------------------------------------------------------------|-------------------------------------------------|
| Performance | | |
| Capacity | 100 Mbps full duplex, 80,000 packets per second | 1 Gbps, 350,000 packets per second |
| Emulation Settings | | |
| Bandwidth | 300 bps – 100 Mbps in 1 bps increments | 300 bps – 1 Gbps in 1 bps increments |
| Delay | 0 ms. – 10 sec. in 0.1 ms. increments; constant, uniform, normal distributions | |
| Packet Loss Rate | 0 – 100% in increments of 0.0001% | |
| Additional Parameters | Bit Error Rate, Queue Depth, Framing Overhead | |
| Interfaces | | |
| Emulation | 2 x 10/100baseT Ethernet | 2 x Gigabit Ethernet |
| Management | 1 x 10/100baseT Ethernet, 1 x RS-232 serial console | 1 x Gigabit Ethernet, 1 x RS-232 serial console |
| Physical | | |
| Weight | 1.1 lbs (0.5 kg) | |
| Dimensions | 6.6" W x 6.2" D x 1.2" H (168 mm x 157 mm x 30 mm) | |
| Power Input | 7 - 20V DC power, 6 Watts | 12V DC power, 11 Watts |

Linktropy Family

For more comprehensive product testing and high-precision benchmarking, Apposite offers the Linktropy 5510 and 8510 models built with the high level of precision, performance, and functionality required by network managers, IT staff, product developers, customer support, and QA teams.



11500 W. OLYMPIC BLVD., SUITE 510
LOS ANGELES, CA 90064 USA
TEL: 1.310.477.9955 | FAX: 1.310.477.9956
info@apposite-tech.com | www.apposite-tech.com

