


SuperPod with WiFi 6E

Size & weight

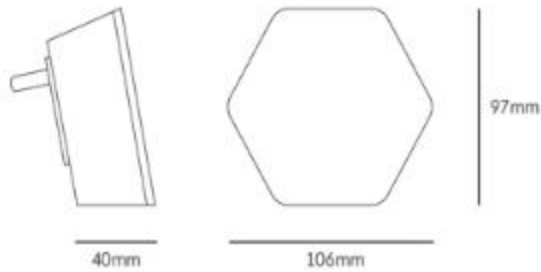

Dimensions

106mm W x 97mm H x 40mm D

Not including plug

Weight

290g

WiFi, ethernet, and IoT interfaces

WiFi interfaces

4x4 MIMO 802.11ax 6GHz

4x4 MIMO 802.11a/n/ac/ax 5GHz

2x2 MIMO 802.11b/g/n/ax 2.4GHz

Tri-band, tri-concurrent radio 5GHz and 6GHz with SU and MU-MIMO Beamforming, and OFDMA

WiFi channel bandwidth

6GHz

20/40/80/160MHz

5GHz

20/40/80MHz

2.4GHz

20/40 MHz

WiFi channels

6GHz

1 to 97, 101 to 117, 121 to 185, 189 to 233

5GHz

36 to 48, 149 to 161 Region dependent

2.4GHz

1 to 13

Ethernet interfaces

1x 100/1000 Base-T and 1x 2.5G Base-T Ethernet with autosense WAN or LAN configuration

IoT radios

Bluetooth Low Energy

Power

Power supply

100 to 240VAC, 50 to 60Hz

Power consumption

11W Standby

16W Average

26W Maximum

Plug type

Type A (NA and Japan)

Type C (EU)

Type G (UK)

Environment

Operating temperature

0°C to 40°C

Operating relative humidity

10% to 90%

Storage conditions

-20°C to 70°C

10% to 90% (relative humidity)

Networking and connectivity

Networking modes

Auto-sensing Router or Bridge mode

Firewall and networking

NAT, DHCP server, UPnP, client IP reservation, port forwarding

Home SSIDs

Managed 2.4 GHz, 5 GHz and 6GHz single SSID

Guest access

HomePass® Control guest network with multiple unique passwords and custom policy enforcement

Security

Authentication

WPA2-PSK (KRACK Patched)

WPA3

Encryption

WPA2 with AES and WPA3 with SAE